

FR12 Air Admittance Valve Box

Models 82456

1. Wall Construction

- Wood Or Steel Stud
- 1 Hour firewall construction consisting of each stud face being finished with 5/8 gypsum
- 2 Hour firewall construction consisting of each stud face being finished with 2 layers of 5/8 gypsum

2. Box Mounting

- Box should be securely fastened to stud with screws or nails
- Box units cannot be installed back to back within the same wall cavity

3. Piping Options

- Drains may be nominal 2" or larger PVC, ABS or metallic pipe
- All plumbing within the wall must be secured

4. Air Admittance Valves

- To be used with Studor® MINI-VENT® or REDI-VENT®

5. Air Register

- Install air register on finished wall with provided screws



6. Intumescent Pad

- The IPS FR12 Series washer box is manufactured from special flame resistant resin with an intumescent pad factory installed on the back of the box (do not remove).
- Gaps between the box and the gypsum may be filled up to 1/2" with dry wall plaster.

Ratings: ASTM-E814 - 1 Hour (F), 1 Hour (T)
 CAN/ULC - S115 1 Hour (F/FH), 1 Hour (FT/FTH)
 ASTM-E814 - 2 Hour (F), 1.2 5 Hour (T)
 CAN/ULC- S115 2 Hour (F/FH), 1.25 Hour (FT/FTH)
 Firestop Device, Design No. IPS/PV 120-01



Intertek
 Control No. 5006851

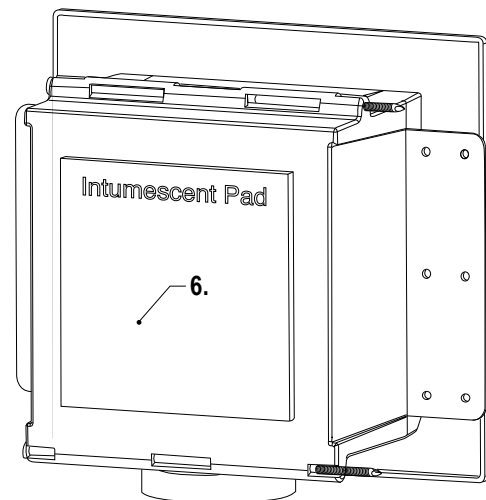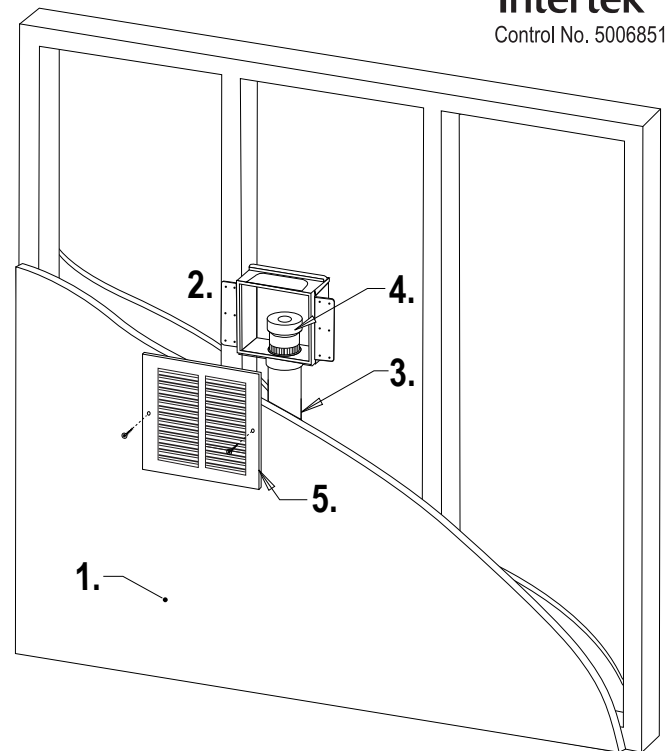

IPS
 CORPORATION

500 Distribution Parkway, Collierville, TN 38017 ▪ Phone: 800-888-8312 ▪ Fax: 901-853-5008 ▪ www.ipscorp.com